
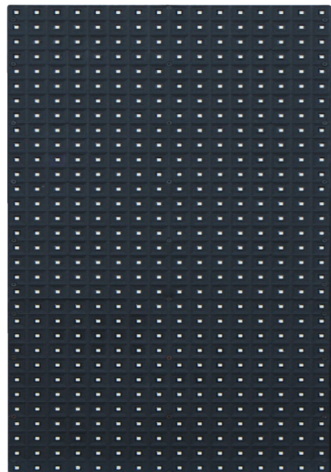


### PALAMI-SlimRENT DATASHEET

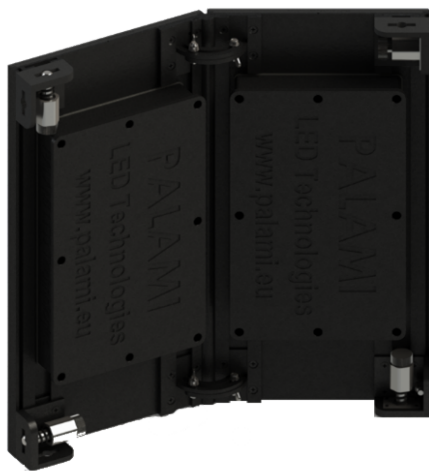

PALAMI - SlimRENT is extremely thin, light screen of a wide range of applications, which can be used to broadcast various formats and high definition information. There are no visible interconnections and the construction of modules gives ability to create banners of different length. It can be effectively used by renting it out.

Parameter	SlimRENT-3.75	SlimRENT-5.45	SlimRENT-7.5	SlimRENT-11	SlimRENT-15
Physical pixel pitch, (mm)	3.75	5.45	7.5	10.909	15
Place	Indoor	Indoor / outdoor	Indoor / outdoor	Indoor / outdoor	outdoor
Pixel configuration	1(RGB)	1(RGB)	1(RGB)	1(RGB)	1(RGB)
Panel size, (mm)	480 (h) x 480	480 (h) x 480	480 (h) x 480	480 (h) x 480	480 (h) x 480
Panel resolution, (pixels)	128 x 128	88 x 88	64 x 64	44 x 44	32 x 32
Brightness, not less than, (Cd/m2)	2 300	2 300 / 8 000	2 300 / 8 000	8 000	8 000
Colour depth, millions, more than	16.7	16.7	16.7	16.7	16.7
Viewing angle horizontal, vertical	120° / 120°	120° / 120°	120° / 120°	120° / 120°	120° / 120°
Electric power supply	AC100~240V(50-60Hz)	AC100~240V(50-60Hz)	AC100~240V(50-60Hz)	AC100~240V(50-60Hz)	AC100~240V(50-60Hz)
Maximum power consumption, (kW/m2)	0.8	0.77 / 0.79	0.8 / 0.79	0.77 / 0.79	0.79
Average power consumption, (kW/m2)	0.32	0.3 / 0.315	0.32 / 0.315	0.3 / 0.315	0.315
Ingress protection	IP31	IP31 / IP65	IP31/ IP65	IP31/ IP65	IP65
Lifetime, not less than (hours)	100 000	100 000	100 000	100 000	100 000
Weight, kg/panel	9.1	9.1 OR 10.2	9 OR 10.1	9 OR 10.1	9.2